

2015  
**COST**  
**VS.**  
**VALUE**

[www.costvsvalue.com](http://www.costvsvalue.com)

**r**emodeling

YOUR TOOLBOX FOR SUCCESS

# 2015 COST VS. VALUE

## Midrange Project Descriptions

### ATTIC BEDROOM REMODEL

Convert unfinished attic space to a 15-by-15-foot bedroom and a 5-by-7-foot bathroom with shower. Include a 15-foot shed dormer, four new windows, and closet space under the eaves. Insulate and finish ceiling and walls. Carpet floor. Extend existing HVAC to new space; provide electrical wiring and lighting to code. Retain existing stairs, but add rail and baluster around stairwell.

### BACKUP POWER GENERATOR

Install modular electrical backup system with capacity for providing 70 amps of emergency power in two 240-volt circuits and six 120-volt circuits. Assume existing propane gas supply. Include generator mounted on 2-by-4-four-foot concrete or composite pad, automatic transfer switch, load center, exterior disconnect, and grounding rod. Include 30 feet of conduit and electrical cable for generator connections; grounded cable for circuits; 5 feet of flexible fuel line for connection to existing rigid gas supply line; and automotive-type storage battery.

### BASEMENT REMODEL

Finish the lower level of a house to create a 20-by-30-foot entertaining area with wet bar and a 5-by-8-foot full bathroom; construct 24 linear feet of finished partition to enclose mechanical area. Walls and ceilings are painted drywall throughout; exterior walls are insulated; painted trim throughout. Include five six-panel factory-painted hardboard doors with passage locksets. Electrical wiring to code.  
*Main room:* Include 15 recessed ceiling light fixtures and three surface-mounted light fixtures, and a snap-together laminate flooring system.  
*Bathroom:* Include standard white toilet, vanity with cultured marble top, resilient vinyl flooring, two-piece fiberglass shower unit, a light/fan combination, vanity light fixture, recessed medicine cabinet, towel and paper-holder hardware.  
*Bar area:* Include 10 linear feet of raised-panel oak cabinets with laminate countertops, stainless steel bar sink, single-lever bar faucet, undercounter refrigerator, and vinyl floor tile.

### BATHROOM ADDITION

Add a full 6-by-8-foot bathroom over a crawlspace with poured concrete walls. Include cultured-marble vanity top with molded sink; standard chrome faucets; 30-by-60-inch white fiberglass tub/shower with ceramic tile surround; single-lever temperature and pressure-balanced faucet; white low-profile toilet; general and spot lighting; electrical wiring to code; mirrored medicine cabinet; linen storage closet or cabinet; vinyl wallpaper; painted trim; and ceramic tile floor.

### BATHROOM REMODEL

Update an existing 5-by-7-foot bathroom. Replace all fixtures

to include 30-by-60-inch porcelain-on-steel tub with 4-by-4-inch ceramic tile surround; new single-lever temperature and pressure-balanced shower control; standard white toilet; solid-surface vanity counter with integral sink; recessed medicine cabinet with light; ceramic tile floor; vinyl wallpaper.

### DECK ADDITION (WOOD)

Add a 16-by-20-foot deck using pressure-treated joists supported by 4x4 posts anchored to concrete piers. Install pressure-treated deck boards in a simple linear pattern. Include a built-in bench and planter of the same decking material. Include stairs, assuming three steps to grade. Provide a complete railing system using pressure-treated wood posts, railings, and balusters.

### DECK ADDITION (COMPOSITE)

Add a 16-by-20-foot deck using pressure-treated joists supported by 4x4 posts anchored to concrete piers. Install composite deck material in a simple linear pattern. Include a built-in bench and planter of the same decking material. Include stairs, assuming three steps to grade. Provide a complete railing using a matching system made of the same composite as the decking material.

### ENTRY DOOR REPLACEMENT (STEEL)

Remove existing 3-0/6-8 entry door and jambs and replace with new 20-gauge steel unit, including clear dual-pane half-glass panel, jambs, and aluminum threshold with composite stop. Door is factory finished with same color both sides. Exterior brick-mold and 2.5-inch interior colonial or ranch casings in poplar or equal prefinished to match door color. Replace existing lockset with new bored-lock in brass or antique-brass finish.

### ENTRY DOOR REPLACEMENT (FIBERGLASS)

Remove existing 3-0/6-8 entry door and jambs and replace with new fiberglass unit with simulated wood grain, stained same color both sides; dual-pane, decorative half-glass panel with zinc caming; PVC-wrapped exterior trim in color to match existing trim; 2.5-inch interior colonial or ranch casings in hardwood stained to match door. Replace existing lockset with mortise lock with lever handle and integrated deadbolt in oil-rubbed bronze or satin-nickel finish.

### FAMILY ROOM ADDITION

In a style appropriate to the existing house, add a 16-by-25-foot room on a crawlspace foundation with vinyl siding and fiberglass shingle roof. Include drywall interior with fiberglass insulation, pre-finished hardwood floor, and 180 square feet of glazing including windows, atrium-style exterior doors, and two operable skylights. Tie into existing HVAC. Add electrical system to code, including 12 recessed ceiling lights.

# 2015 COST VS. VALUE

## GARAGE ADDITION

Construct a 26-by-26-foot freestanding two-car garage, including footings and slab-on-grade foundation, 2x4 wood frame with OSB structural sheathing, and gable truss roof at 6/12 pitch. Install 25-year asphalt shingle roofing with galvanized metal flashing; vinyl siding and trim. Install five double-hung 30-by-48-inch vinyl windows; one 3-0/6-8 exterior door with half-glass and lockset; and two composite 9-by-8-foot overhead doors with motorized openers. Include 100-amp breaker at main house panel and 50 linear feet of trench buried conduit to feed new electrical subpanel. Provide electrical wiring for openers; three-way switching for fluorescent ceiling fixtures over each bay; three-way switching for two exterior spotlights; outlets to code. Interior wall, floors, and ceilings remain unfinished.

## GARAGE DOOR REPLACEMENT

Remove and dispose of existing 16-by-7-foot garage door and tracks. Install new 4-section garage door on new galvanized steel tracks; reuse existing motorized opener. New door is uninsulated, single-layer, embossed steel with two coats of baked-on paint, galvanized steel hinges, and nylon rollers; 10-year limited warranty.

## HOME OFFICE REMODEL

Convert an existing 12-by-12-foot room to a home office. Install custom cabinets to include 20 linear feet of laminate desktop, computer workstation, and wall cabinet storage. Rewire room for computer, fax machine, and other electronic equipment, as well as cable and telephone lines. Include drywall interior, painted trim, and commercial-grade carpeting.

## MAJOR KITCHEN REMODEL

Update an outmoded 200-square-foot kitchen with a functional layout of 30 linear feet of semi-custom wood cabinets, including a 3-by-5-foot island; laminate countertops; and standard double-tub stainless-steel sink with standard single-lever faucet. Include energy-efficient wall oven, cooktop, ventilation system, built-in microwave, dishwasher, garbage disposal, and custom lighting. Add new resilient flooring. Finish with painted walls, trim, and ceiling.

## MASTER SUITE ADDITION

Add a 24-by-16-foot master bedroom suite over a crawlspace. Include walk-in closet/dressing area, whirlpool tub in ceramic tile platform, separate 3-by-4-foot ceramic tile shower, and double-bowl vanity with solid-surface countertop. Bedroom floor is carpet; bathroom floor is ceramic tile. Painted walls, ceiling, and trim. General and spot lighting, exhaust fan; electrical wiring to code.

## MINOR KITCHEN REMODEL

In a functional but dated 200-square-foot kitchen with 30 linear feet of cabinetry and countertops, leave cabinet boxes in place but replace fronts with new raised-panel wood doors and drawers, including new hardware. Replace wall oven and

cooktop with new energy-efficient models. Replace laminate countertops; install midpriced sink and faucet. Repaint trim, add wall covering, and remove and replace resilient flooring.

## ROOFING REPLACEMENT

Remove existing roofing to bare wood sheathing and dispose of properly. Install 30 squares of 235-pound fiberglass asphalt shingles (min. 25-year warranty) with new felt underlayment, galvanized drip edge, and mill-finish aluminum flashing. Assume a 5-square hip roof; custom flashing at two average-size skylights; and custom cap treatment at vented ridge.

## SIDING REPLACEMENT

Replace 1,250 square feet of existing siding with new vinyl siding, including all trim.

## STONE VENEER ACCENT (MIDRANGE)

Remove a 300 square-foot continuous band of existing vinyl siding from the bottom third of the street-facing façade, beginning at the garage, continuing around the main entry, and ending at the corner of the side addition. Replace with adhered manufactured stone veneer, including 36 linear feet (LF) of sills, 40 LF of corners, and 1 address block. Installation includes 2 separate layers of water resistive barrier laid over bare sheathing, corrosion resistant lath and fasteners, and nominal 1½-inch-thick mortar scratch coat and setting bed. Outline the archway using an 8x10-inch keystone and a soldier course of flats on either side.

## SUNROOM ADDITION

Construct a 200-square-foot sunroom addition, including footings and slab-on-grade foundation. Post-and-beam framing exposed on interior side. Wall glazing: vinyl or aluminum clad awning and casement windows with low-E, laminated or tempered glazing and screens. Roof glazing: 10 large aluminum-clad venting skylights with screens. Provide ceiling fan; insulate all non-glass areas; provide movable shades for glass area. Quarry tile or equal on floor.

## TWO-STORY ADDITION

Add a first-floor family room and a second-floor bedroom with full bathroom in a 24-by-16-foot two-story wing over a crawlspace. Add new HVAC system to handle addition; electrical wiring to code.

*Family room:* Include a prefabricated gas fireplace; 11 3-by-5-foot double-hung insulated clad-wood windows; an atrium-style exterior door; carpeted floors; painted drywall on walls and ceiling; and painted trim.

*Bathroom:* 5 by 8 feet. Include a one-piece fiberglass tub/shower unit; standard white toilet; wood vanity with solid-surface countertop; resilient vinyl flooring; and mirrored medicine cabinet with built-in light strip; papered walls; and painted trim; exhaust fan. *Bedroom:* Include walk-in closet/dressing area; carpet; painted walls, ceiling, and trim; general and spot lighting.

# 2015 COST VS. VALUE

## WINDOW REPLACEMENT (VINYL)

Replace 10 existing 3-by-5-foot double-hung windows with insulated vinyl replacement windows. Wrap existing exterior trim as required to match. Do not disturb existing interior trim.

## WINDOW REPLACEMENT (WOOD)

Replace 10 existing 3-by-5-foot double-hung windows with insulated wood replacement windows, exterior clad in vinyl or aluminum. Wrap existing exterior trim as required to match. Do not disturb existing interior trim.

## Upscale Project Descriptions

### BATHROOM ADDITION

Add a new 100-square-foot master bathroom to existing master bedroom over a crawlspace. Include 42-by-42-inch neo-angle shower with ceramic tile walls with accent strip, recessed shower caddy, body-spray fixtures, and frameless glass enclosure. Include a customized whirlpool tub; stone countertop with two sinks; two mirrored medicine cabinets with lighting; a compartmentalized commode area with one-piece toilet; and a humidistat-controlled exhaust fan. Use all color fixtures. Use larger matching ceramic tiles on the floor, laid on the diagonal with ceramic tile base molding. Add general and spot lighting including waterproof shower fixture. Cabinetry shall include a custom drawer base and wall cabinets for a built-in look. Extend HVAC system, and include electric in-floor heating and heated towel bars.

### BATHROOM REMODEL

Expand an existing 35-square-foot bathroom to 100 square feet within existing house footprint. Relocate all fixtures. Include 42-by-42-inch neo-angle shower with ceramic tile walls with accent strip, recessed shower caddy, body-spray fixtures, and frameless glass enclosure. Include a customized whirlpool tub; stone countertop with two sinks; two mirrored medicine cabinets with lighting; a compartmentalized commode area with one-piece toilet; and a humidistat-controlled exhaust fan. Use all color fixtures. Use larger matching ceramic tiles on the floor, laid on the diagonal with ceramic tile base molding. Add general and spot lighting including waterproof shower fixture. Cabinetry shall include a custom drawer base and wall cabinets for a built-in look. Extend HVAC system, and include electric in-floor heating and heated towel bars.

### DECK ADDITION (COMPOSITE)

Add a 16-by-20-foot deck using pressure-treated joists supported by 4x4 posts anchored to concrete piers. At one corner, add a second, 10-foot-diameter six-sided platform one step down from the main deck. Include stairs on the smaller deck, assuming three steps to grade. Install composite deck

material in a simple linear pattern. Trim the perimeter joists and wrap the 4x4 posts with composite materials to match the decking. Using the same decking material, include a built-in bench and planter along one 16-foot side. On the remaining perimeter, provide a railing system using composite material of contrasting or complementary colors that includes decorative balusters, post caps, and lighting. Railing and trim should provide for overall curb appeal to the outdoor living space by integrating the deck with the home's color and architecture, creating a custom look.

### GARAGE ADDITION

For the same midrange two-car garage, add interior wall finish using moisture-resistant drywall on ceiling and three walls. At rear wall, install modular storage systems including wall panels, upper and lower storage cabinets with work surfaces, and required task lighting. Trim all windows and doors and provide base molding at perimeter; paint all trim, ceiling, and walls. Finish cement floor with color, slip-resistant epoxy sealer.

### GARAGE DOOR REPLACEMENT

Remove and dispose of existing 16x7-foot garage door and tracks. Install new 4-section garage door on new heavy-duty galvanized steel tracks; reuse existing motorized opener. New door is high tensile strength steel with two coats of factory-applied paint and foam insulated to minimum R-12 with thermal seals between pinch-resistant panels. Windows in top panel are ½-inch insulated glass. Hardware includes galvanized steel hinges and ball-bearing urethane rollers. Lifetime warranty.

### GRAND ENTRANCE (FIBERGLASS)

Remove existing 3-0/6-8 entry door and cut and reframe opening for a 12-36-12 entrance door with dual sidelites. Move double-gang electrical box with two switches. Fiberglass door blank matches upscale entry, including color, threshold, lockset, and decorative half-glass; sidelites match door. PVC-wrapped exterior trim in color to match existing trim; wider interior colonial or ranch casings (3.5-inch to cover new jack studs) in hardwood stained to match door. All work to be completed in one day.

### MAJOR KITCHEN REMODEL

Update outmoded 200-square-foot kitchen with 30 linear feet of top-of-the-line custom cherry cabinets with built-in sliding shelves and other interior accessories. Include stone countertops with imported ceramic- or glass-tile backsplash; built-in refrigerator, cooktop, and 36-inch commercial grade range and vent hood; built-in warming drawer, trash compactor, and built-in combination microwave and convection oven. Install high-end undermount sink with designer faucets and built-in water filtration system. Add new general and task lighting including low-voltage undercabinet lights. Install cork flooring, cherry trim.

# 2015 COST VS. VALUE

## MASTER SUITE ADDITION

Add a 32-by-20-foot master bedroom suite over a crawlspace.

*Bedroom:* Add a spacious sleeping area with lounging/sitting area adjacent to large master bathroom. Include custom bookcases and built-in storage with millwork details; high-end gas fireplace with stone hearth and custom mantle; and large walk-in closet/dressing area with natural light, mirrors, and linen storage. Add French doors to exterior.

*Bathroom:* Include a large walk-in shower with dual-shower system, stone shower walls and floor, and custom frameless glass enclosure. Add corner-design whirlpool tub bordered on two sides by windows and built into granite or marble platform with custom cabinet front. Include two sinks in separate custom vanities with stone countertops and large mirrors. Create partitioned area for luxury one-piece toilet.

*General:* Add 5-foot-long hospitality center with bar sink, undercounter refrigerator, custom cabinetry, granite or marble countertop, and microwave. Include soundproofing, in-floor heating, custom wall finishes and hardware, general and spot lighting, and lighting controls.

## ROOFING REPLACEMENT

Remove existing roofing to bare wood sheathing and dispose of properly. Install 30 squares of standing-seam metal, formed on site into 16-inch panels using factory-enameled roll steel; double-lock all seams. Use custom brake-bent flashing from same material for drip edge and all flashing at roof-wall intersections. Assume a 5-square hip roof; custom flashing at two average-sized skylights; and custom cap treatment at vented ridge. Apply over new felt underlayment; use ice-and-water membrane at eaves, valleys, and all penetrations.

## SIDING REPLACEMENT (FIBER-CEMENT)

Replace 1,250 square feet of existing siding with new fiber-cement siding, factory primed and factory painted. Include all 4/4 and 5/4 trim using either fiber-cement boards or cellular PVC.

## SIDING REPLACEMENT (FOAM-BACKED VINYL)

Replace 1,250 square feet of existing siding with new foam-backed vinyl siding, including factory trim at all openings and corners.

## WINDOW REPLACEMENT (VINYL)

Replace 10 existing 3-by-5-foot double-hung windows with insulated, low-E, simulated-divided-lite vinyl windows. Simulated wood-grain interior finish; custom-color exterior finish. Trim exterior to match existing; do not disturb existing interior trim.

## WINDOW REPLACEMENT (WOOD)

Replace 10 existing 3-by-5-foot double-hung windows with insulated, low-E, simulated-divided-lite wood windows. Interior finish of stained hardwood; exterior finish of custom-color aluminum cladding. Trim exterior to match existing; do not disturb existing interior trim.

## Reuse and Licensing of Data

### COPYRIGHTED MATERIAL

The Remodeling Cost vs. Value Report contains copyrighted material that is being made available in free downloadable PDF documents as a public service. Any reuse without express permission is prohibited, including but not limited to the following:

1. **RESALE.** The Cost vs. Value Report, whether in whole or part, may not be reproduced and sold in any format, including print, digital, electronic file, fax, or other medium.
2. **PUBLICATION OF DATA.** The Cost vs. Value Report, whether in whole or part, may not be distributed or published in any format, including print, digital, electronic file, fax, or other medium without obtaining express permission.
3. **APPLICATIONS/SOFTWARE.** The Cost vs. Value Report, whether in whole or part, may not be incorporated for use in any kind of computer- or Web-based application, calculator, database, or other automated, electronic, or digital device, instrument, or software except as licensed by Hanley Wood (see Licensing, below).

### EXCERPTING COST VS. VALUE REPORT DATA

Excerpts of Cost vs. Value Report data may not take the form of a chart or table that simulates the manner in which the data is displayed at [www.costvsvalue.com](http://www.costvsvalue.com).

Excerpts of Cost vs. Value Report data may, however, be made as part of a narrative, provided that the sum total of all excerpts from any publisher in all formats does not exceed data from more than five projects.

### ACKNOWLEDGING COST VS. VALUE AS DATA SOURCE

When excerpting Cost vs. Value Report data, refer to the "Remodeling 2015 Cost vs. Value Report" and include the URL [www.costvsvalue.com](http://www.costvsvalue.com), as in the following examples:

- "... according to the Remodeling 2015 Cost vs. Value Report ([www.costvsvalue.com](http://www.costvsvalue.com)) ..."
- "... as compiled in the Remodeling 2015 Cost vs. Value Report ([www.costvsvalue.com](http://www.costvsvalue.com)) ...."

This form of citation should be used in the first instance on every page of a multipage online story that cites the Cost vs. Value Report on multiple pages. Subsequent references on a given page may be foreshortened to "Cost vs. Value Report."

All excerpts must be accompanied by one or more instances of the following acknowledgements of copyright:

"© 2015 Hanley Wood, LLC. Complete data from the Remodeling 2015 Cost vs. Value Report can be downloaded free at [www.costvsvalue.com](http://www.costvsvalue.com)."

### LICENSING OF 2015 COST VS. VALUE REPORT DATA

For permission to license data from the 2015 Cost vs. Value Report for use in any kind of computer- or Web-based application, calculator, database, or other automated, electronic, or digital device, instrument, or software, include the following in an email request to [costvsvaluepermissions@hanleywood.com](mailto:costvsvaluepermissions@hanleywood.com)

- a description of the application, calculator, or device for which use of the data is being requested. Include the length of time for which the license is sought.
- a detailed description of the material to be licensed (e.g., specific projects, cities, etc.).

2015  
**COST**  
 VS.  
**VALUE**

PROJECT TYPE	MILWAUKEE		
	Job Cost	Resale Value	Cost Recouped
<b>MIDRANGE</b>			
Attic Bedroom Remodel	\$54,063	\$37,661	69.7%
Backup Power Generator	12,393	6,114	49.3%
Basement Remodel	68,080	42,346	62.2%
Bathroom Addition	41,333	23,939	57.9%
Bathroom Remodel	17,580	12,189	69.3%
Deck Addition (wood)	10,568	7,272	68.8%
Deck Addition (composite)	16,408	9,913	60.4%
Entry Door Replacement (steel)	1,277	1,112	87.1%
Entry Door Replacement (fiberglass)	2,985	1,902	63.7%
Family Room Addition	87,383	51,542	59.0%
Garage Addition	53,912	33,044	61.3%
Garage Door Replacement	1,644	1,020	62.0%
Home Office Remodel	30,229	13,613	45.0%
Major Kitchen Remodel	58,450	37,389	64.0%
Master Suite Addition	114,709	68,097	59.4%
Minor Kitchen Remodel	19,966	15,798	79.1%
Roofing Replacement	19,806	12,304	62.1%
Siding Replacement (vinyl)	12,711	8,696	68.4%
Sunroom Addition	78,101	36,929	47.3%
Two-Story Addition	167,117	104,962	62.8%
Window Replacement (vinyl)	10,691	7,025	65.7%
Window Replacement (wood)	11,715	7,831	66.8%
Stone Veneer Accent	7,114	5,574	78.4%
<b>UPSCALE</b>			
Bathroom Addition	\$78,572	\$43,850	55.8%
Bathroom Remodel	55,365	32,676	59.0%
Deck Addition (composite)	37,663	20,642	54.8%
Garage Addition	88,225	45,133	51.2%
Garage Door Replacement	3,000	2,079	69.3%
Grand Entrance	7,694	5,394	70.1%
Major Kitchen Remodel	116,069	67,120	57.8%
Master Suite Addition	242,419	126,280	52.1%
Roofing Replacement	38,499	19,456	50.5%
Siding Replacement (fiber-cement)	14,843	13,286	89.5%
Siding Replacement (foam-backed vinyl)	15,901	10,553	66.4%
Window Replacement (vinyl)	14,259	9,826	68.9%
Window Replacement (wood)	17,850	10,846	60.8%

2015  
**COST**  
 VS.  
**VALUE**

PROJECT TYPE	EAST NORTH CENTRAL		
	Job Cost	Resale Value	Cost Recouped
<b>MIDRANGE</b>			
Attic Bedroom Remodel	\$52,433	\$37,226	71.0%
Backup Power Generator	12,240	6,215	50.8%
Basement Remodel	66,425	39,601	59.6%
Bathroom Addition	40,392	20,392	50.5%
Bathroom Remodel	17,120	10,337	60.4%
Deck Addition (wood)	10,275	7,217	70.2%
Deck Addition (composite)	16,086	9,646	60.0%
Entry Door Replacement (steel)	1,244	1,073	86.3%
Entry Door Replacement (fiberglass)	2,946	2,044	69.4%
Family Room Addition	85,380	50,207	58.8%
Garage Addition	52,758	29,531	56.0%
Garage Door Replacement	1,610	1,341	83.3%
Home Office Remodel	29,468	11,792	40.0%
Major Kitchen Remodel	57,407	35,127	61.2%
Master Suite Addition	112,684	60,291	53.5%
Minor Kitchen Remodel	19,503	13,522	69.3%
Roofing Replacement	19,503	12,507	64.1%
Siding Replacement (vinyl)	12,236	8,944	73.1%
Sunroom Addition	76,677	34,175	44.6%
Two-Story Addition	163,914	95,741	58.4%
Window Replacement (vinyl)	10,448	7,762	74.3%
Window Replacement (wood)	11,472	8,196	71.4%
Stone Veneer Accent	7,189	5,822	81.0%
<b>UPSCALE</b>			
Bathroom Addition	\$77,538	\$39,733	51.2%
Bathroom Remodel	54,622	29,103	53.3%
Deck Addition (composite)	36,828	19,729	53.6%
Garage Addition	86,319	41,915	48.6%
Garage Door Replacement	2,966	2,282	77.0%
Grand Entrance	7,603	4,575	60.2%
Major Kitchen Remodel	114,020	60,906	53.4%
Master Suite Addition	239,034	115,520	48.3%
Roofing Replacement	37,201	20,363	54.7%
Siding Replacement (fiber-cement)	14,314	11,358	79.4%
Siding Replacement (foam-backed vinyl)	15,449	10,733	69.5%
Window Replacement (vinyl)	13,970	9,969	71.4%
Window Replacement (wood)	17,576	11,688	66.5%

CONFIDENCE LEVEL: 95% +/-5.08

This document contains copyrighted material and is not authorized for display on the Internet or for republication in any media for resale.  
 ©2015 Hanley Wood, LLC. Republication or dissemination of Remodeling's 2015 Cost vs. Value Report is expressly prohibited without the written permission of Hanley Wood, LLC. "Cost vs. Value" is a registered trademark of Hanley Wood, LLC. Unauthorized use is prohibited.

2015  
**COST**  
VS.  
**VALUE**

PROJECT TYPE	2015 NATIONAL AVERAGES		
	Job Cost	Resale Value	Cost Recouped
<b>MIDRANGE</b>			
Attic Bedroom Remodel	\$51,696	\$39,908	77.2%
Backup Power Generator	12,135	7,263	59.9%
Basement Remodel	65,442	47,637	72.8%
Bathroom Addition	39,578	22,875	57.8%
Bathroom Remodel	16,724	11,707	70.0%
Deck Addition (wood)	10,048	8,085	80.5%
Deck Addition (composite)	15,912	10,816	68.0%
Entry Door Replacement (steel)	1,230	1,252	101.8%
Entry Door Replacement (fiberglass)	2,926	2,107	72.0%
Family Room Addition	84,201	53,955	64.1%
Garage Addition	52,382	33,938	64.8%
Garage Door Replacement	1,595	1,410	88.4%
Home Office Remodel	29,066	14,155	48.7%
Major Kitchen Remodel	56,768	38,485	67.8%
Master Suite Addition	111,245	68,596	61.7%
Minor Kitchen Remodel	19,226	15,255	79.3%
Roofing Replacement	19,528	13,975	71.6%
Siding Replacement (vinyl)	12,013	9,694	80.7%
Sunroom Addition	75,726	36,704	48.5%
Two-Story Addition	161,925	103,848	64.1%
Window Replacement (vinyl)	11,198	8,163	72.9%
Window Replacement (wood)	11,341	8,937	78.8%
Stone Veneer Accent	7,150	6,594	92.2%
<b>UPSCALE</b>			
Bathroom Addition	\$76,429	\$44,750	58.6%
Bathroom Remodel	54,115	32,385	59.8%
Deck Addition (composite)	36,385	21,437	58.9%
Garage Addition	85,592	46,791	54.7%
Garage Door Replacement	2,944	2,429	82.5%
Grand Entrance	7,548	5,099	67.6%
Major Kitchen Remodel	113,097	66,747	59.0%
Master Suite Addition	236,363	126,860	53.7%
Roofing Replacement	36,329	22,840	62.9%
Siding Replacement (fiber-cement)	14,014	11,816	84.3%
Siding Replacement (foam-backed vinyl)	15,184	11,790	77.6%
Window Replacement (vinyl)	13,837	10,365	74.9%
Window Replacement (wood)	17,422	12,533	71.9%

CONFIDENCE LEVEL: 95% +/- 1.82

This document contains copyrighted material and is not authorized for display on the Internet or for republication in any media for resale.

©2015 Hanley Wood, LLC. Republication or dissemination of Remodeling's 2015 Cost vs. Value Report is expressly prohibited without the written permission of Hanley Wood, LLC. "Cost vs. Value" is a registered trademark of Hanley Wood, LLC. Unauthorized use is prohibited.



PROJECT TYPE	MILWAUKEE			EAST NORTH CENTRAL			2015 NATIONAL AVERAGES		
	Job Cost	Resale Value	Cost Recouped	Job Cost	Resale Value	Cost Recouped	Job Cost	Resale Value	Cost Recouped
<b>MIDRANGE</b>									
Attic Bedroom Remodel	\$54,063	\$37,661	69.7%	\$52,433	\$37,226	71.0%	\$51,696	\$39,908	77.2%
Backup Power Generator	12,393	6,114	49.3%	12,240	6,215	50.8%	12,135	7,263	59.9%
Basement Remodel	68,080	42,346	62.2%	66,425	39,601	59.6%	65,442	47,637	72.8%
Bathroom Addition	41,333	23,939	57.9%	40,392	20,392	50.5%	39,578	22,875	57.8%
Bathroom Remodel	17,580	12,189	69.3%	17,120	10,337	60.4%	16,724	11,707	70.0%
Deck Addition (wood)	10,568	7,272	68.8%	10,275	7,217	70.2%	10,048	8,085	80.5%
Deck Addition (composite)	16,408	9,913	60.4%	16,086	9,646	60.0%	15,912	10,816	68.0%
Entry Door Replacement (steel)	1,277	1,112	87.1%	1,244	1,073	86.3%	1,230	1,252	101.8%
Entry Door Replacement (fiberglass)	2,985	1,902	63.7%	2,946	2,044	69.4%	2,926	2,107	72.0%
Family Room Addition	87,383	51,542	59.0%	85,380	50,207	58.8%	84,201	53,955	64.1%
Garage Addition	53,912	33,044	61.3%	52,758	29,531	56.0%	52,382	33,938	64.8%
Garage Door Replacement	1,644	1,020	62.0%	1,610	1,341	83.3%	1,595	1,410	88.4%
Home Office Remodel	30,229	13,613	45.0%	29,468	11,792	40.0%	29,066	14,155	48.7%
Major Kitchen Remodel	58,450	37,389	64.0%	57,407	35,127	61.2%	56,768	38,485	67.8%
Master Suite Addition	114,709	68,097	59.4%	112,684	60,291	53.5%	111,245	68,596	61.7%
Minor Kitchen Remodel	19,966	15,798	79.1%	19,503	13,522	69.3%	19,226	15,255	79.3%
Roofing Replacement	19,806	12,304	62.1%	19,503	12,507	64.1%	19,528	13,975	71.6%
Siding Replacement (vinyl)	12,711	8,696	68.4%	12,236	8,944	73.1%	12,013	9,694	80.7%
Sunroom Addition	78,101	36,929	47.3%	76,677	34,175	44.6%	75,726	36,704	48.5%
Two-Story Addition	167,117	104,962	62.8%	163,914	95,741	58.4%	161,925	103,848	64.1%
Window Replacement (vinyl)	10,691	7,025	65.7%	10,448	7,762	74.3%	11,198	8,163	72.9%
Window Replacement (wood)	11,715	7,831	66.8%	11,472	8,196	71.4%	11,341	8,937	78.8%
Stone Veneer Accent	7,114	5,574	78.4%	7,189	5,822	81.0%	7,150	6,594	92.2%
<b>UPSCALE</b>									
Bathroom Addition	\$78,572	\$43,850	55.8%	\$77,538	\$39,733	51.2%	\$76,429	\$44,750	58.6%
Bathroom Remodel	55,365	32,676	59.0%	54,622	29,103	53.3%	54,115	32,385	59.8%
Deck Addition (composite)	37,663	20,642	54.8%	36,828	19,729	53.6%	36,385	21,437	58.9%
Garage Addition	88,225	45,133	51.2%	86,319	41,915	48.6%	85,592	46,791	54.7%
Garage Door Replacement	3,000	2,079	69.3%	2,966	2,282	77.0%	2,944	2,429	82.5%
Grand Entrance	7,694	5,394	70.1%	7,603	4,575	60.2%	7,548	5,099	67.6%
Major Kitchen Remodel	116,069	67,120	57.8%	114,020	60,906	53.4%	113,097	66,747	59.0%
Master Suite Addition	242,419	126,280	52.1%	239,034	115,520	48.3%	236,363	126,860	53.7%
Roofing Replacement	38,499	19,456	50.5%	37,201	20,363	54.7%	36,329	22,840	62.9%
Siding Replacement (fiber-cement)	14,843	13,286	89.5%	14,314	11,358	79.4%	14,014	11,816	84.3%
Siding Replacement (foam-backed vinyl)	15,901	10,553	66.4%	15,449	10,733	69.5%	15,184	11,790	77.6%
Window Replacement (vinyl)	14,259	9,826	68.9%	13,970	9,969	71.4%	13,837	10,365	74.9%
Window Replacement (wood)	17,850	10,846	60.8%	17,576	11,688	66.5%	17,422	12,533	71.9%

# 2015 COST VS. VALUE



The 2015 REMODELING Cost vs. Value Report has been brought to you thanks to the following companies.



Welcome style.

When your favorite room in the house  
IS NOT ACTUALLY IN THE HOUSE.

We know a great little spot for dining out that's right in the neighborhood.

The authentic, lasting character of James Hardie® siding and trim makes it hard to justify sitting indoors – ever.

We build character.  
jameshardie.com



**YOUR OLD DECK:** UNSIGHTLY SCREWS.  
STAINED AND FADED FINISH.



**YOUR NEW ONE:** TOTALLY HIDDEN FASTENERS.  
25-YEAR STAIN AND FADE WARRANTY.

Kleer Decking +PLUS. A complete system of innovative building solutions.

How do traditional decks compare to **Kleer Decking +Plus**? Frankly, there is no comparison. With a specially designed **hidden fastener system**, an industry leading **25-year stain and fade warranty**, and a **lifetime warranty that includes labor for the first two years**, the deck you install today will look just as impressive for many tomorrows to come.

See how Kleer continues to **think beyond wood** at [KleerDecking.com](http://KleerDecking.com)



**SO COST EFFECTIVE** *it practically* **PAYS FOR ITSELF**



Upgrading a garage door is one of the most cost effective renovations a homeowner can make. In fact, according to the Cost vs. Value Report, replacing a basic garage door with an upgraded one from Overhead Door returned a remarkable 88.4% on original cost. Now, that's a return on investment you can take to the bank.

**The Genuine. The Original.**



\* Based on National Association of Realtors members included in Cost vs. Value Study rather than actual sales data. Complete data from the Remodeling 2015 Cost vs. Value report can be downloaded at [www.costsvsvalue.com](http://www.costsvsvalue.com).

[www.OverheadDoor.com](http://www.OverheadDoor.com)



Who really cares about the details of your windows?

Michael Yoder of our Sugarcreek, OH facility does.

It's a careful process for skilled workers to apply the precision-milled, furniture-grade wood components to the inside of an Aeris™ Wx1000 vinyl window sash. But it's that expert human interaction that helps the wood pieces come together just right--ultimately unveiling a beautiful and complete wood interior.

It's our mission—to serve by caring for details in ways others won't—that ensures the highest manufacturing standards. We're building our products and our company to last a lifetime. That's the Professional Way.

[www.proviaproducts.com](http://www.proviaproducts.com)

The Professional Way is the only way at ProVia.



Where does personal style come from?

Is it born from an experience? A sight? A sound? A taste?

Does it arrive fully formed, or grow slowly over time?

Whatever its origins, one thing is certain:

It's not just about where your style came from.

**It's where it takes you.**



Welcome style.

Explore thousands of looks that let you bring any vision to life. | [schlage.com](http://schlage.com)

© 2014 Schlage Lock Company, LLC



## Classic-Craft<sup>®</sup> Premium Entryways

Image: Classic-Craft, American Collection - Villager - Glass Door - CCA232, Sidelites - CCA3402SL, Transom - VGRT, Dentil Shelf ©2015 Therma-Tru Corp. All rights reserved. The Best Buy Seal and other licensed materials are registered certification marks and trademarks of Consumers Digest Communications, LLC, used under license. For award information, visit ConsumersDigest.com. JAN 2015

Extraordinary in every detail.

An inspired blend of precision engineering and architectural character produce an entryway that performs as exceptionally as it looks.

View all five unique entryway collections.


[www.thermatru.com/products/entry/fiberglass-entry-doors](http://www.thermatru.com/products/entry/fiberglass-entry-doors)

**THERMA-TRU<sup>®</sup>**  
DOORS

## ADDING STYLE AND VALUE TO YOUR HOME IS EXHILARATING!

Getting the style you want in a remodel has never been easier. Waypoint's quality cabinetry, decorative accessories and organization options can create the look you want and add value to your home with style!

Go to [waypointlivingspaces.com](http://waypointlivingspaces.com) to find your style and a dealer near you.

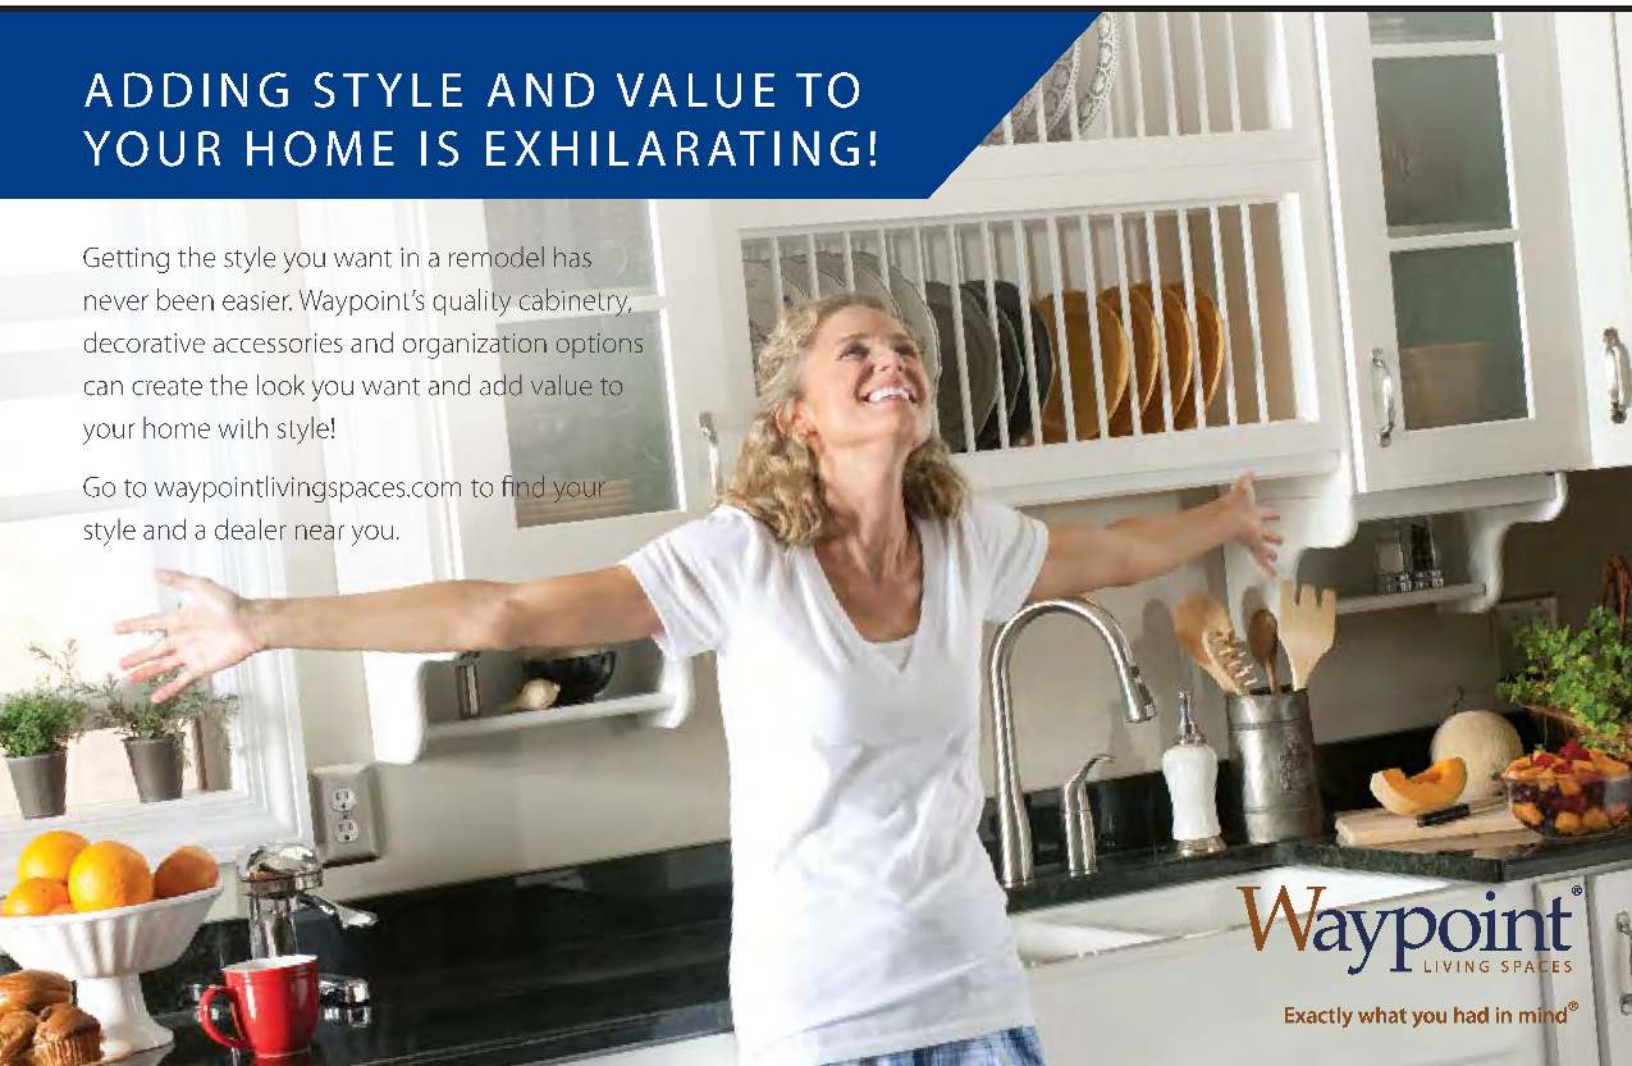

**Waypoint<sup>®</sup>**  
LIVING SPACES

Exactly what you had in mind<sup>®</sup>